



Pivot

F39 | Pendant System

Designer **Vittorio Massimo**

Pivot - a complete collection of architectural lighting. Minimalism at its finest- the form is clean and simple and provides ample illumination and functional flexibility. The pendant system can be used to create large patterns of functional illumination for commercial installations.




ETL Listed to UL Standard 1598

Pendant System Overview

Features -



- Linear pendant system that can be joined to create larger installations
- Dynamic direct and/or indirect illumination with 360° rotating light bar
- 62" long light bar
- Offered in white, anthracite or bronze anodized finish
- Aluminum construction
- Low profile design

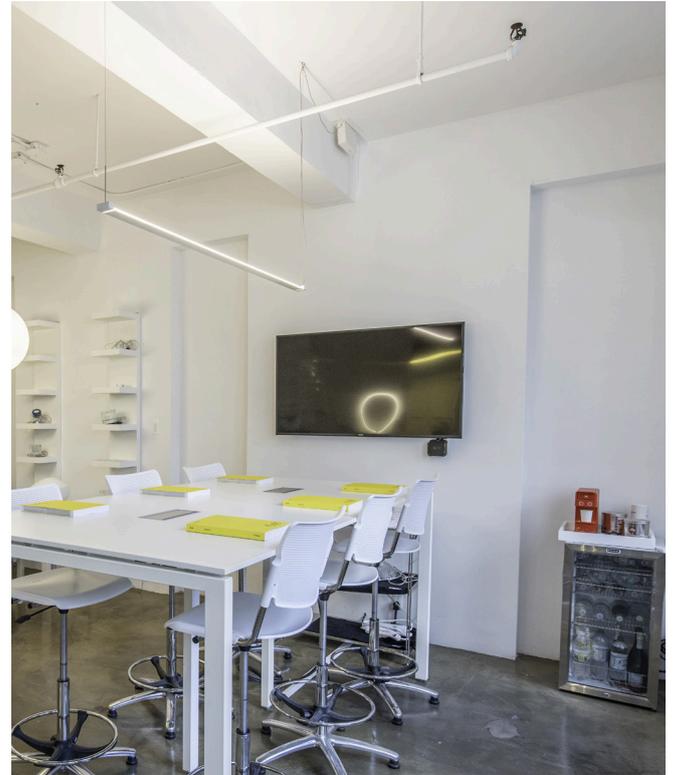

- 70W 120V 3000K 7500 lumens CRI >80 LED
 - 277 Volt available
 - Floating canopies for mounting flexibility
 - Optional recessable driver box
 - 2 or 3 light coupling accessories to create long lines of light or form shapes.
 - Custom color temperature options
 - Custom RAL/Pantone color options
 - BIM Files available for Revit, Sketchup, CAD
- www.bimobject.com/fabbian

Concept Sketches

Pivot Linear can be used to create lighting schemes for large open spaces. The below reflected-ceiling plan sketches demonstrate some of the scope and scale that is possible with the Pivot pendants and the 2 and 3 connectors.

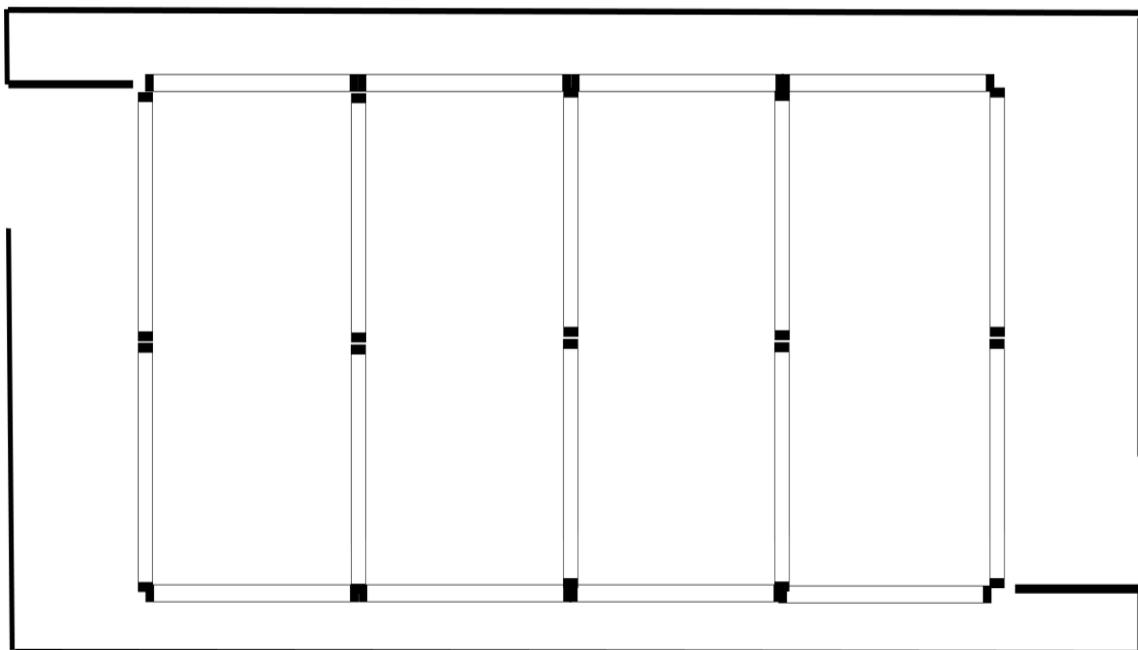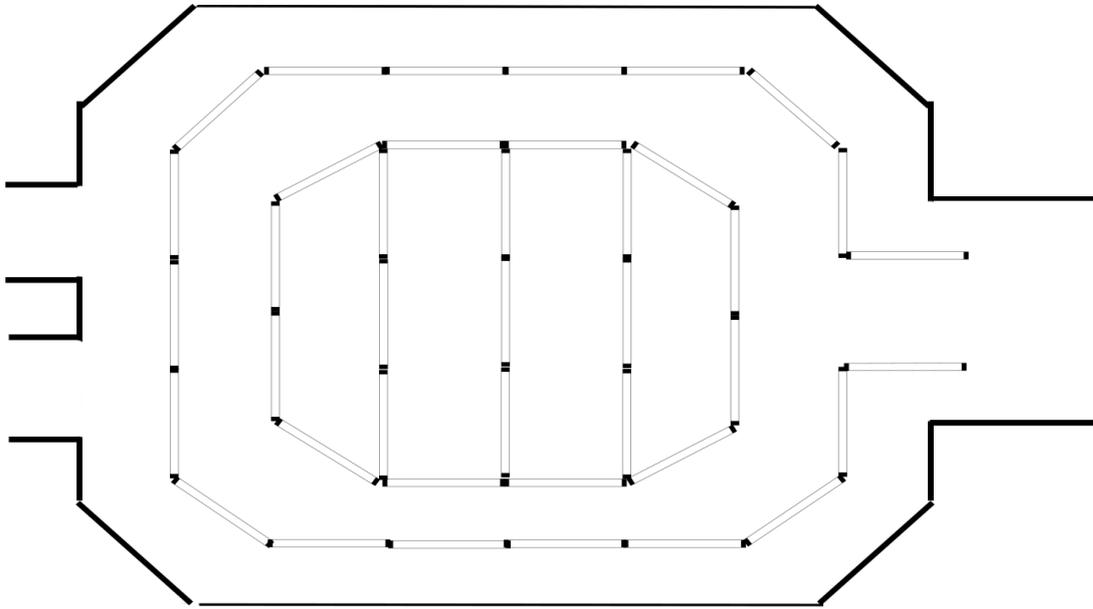


Designing Your Layout

1. The Pendant

Pivot pendants allow for the creation of simple to more complex lighting layouts. The foundational building block is the linear pendant, offered in three finishes.


- F39 A01A 01 - White
- F39 A01A 21 - Anthracite
- F39 A01A 76 - Bronze

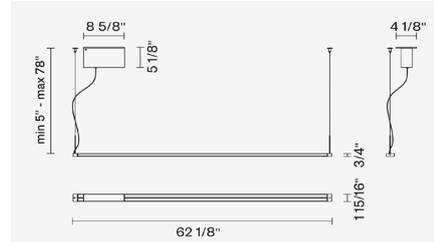

2. Additional hardware

Pivot offers 2 or 3 light connection pieces, to join pendants together into long linear runs or into different shapes.

- F39 Z01A 27 - 2 Connections, aluminum finish
- F39 Z01A 76 - 2 Connections, bronze finish
- F39 Z03A 27 - 3 Connections, aluminum finish
- F39 Z03A 76 - 3 Connections, bronze finish



3. System options

Drivers

- 120V, 96W 0-10V Dimming Driver (Standard)
- 277V, 96W, 0-10V Dimming Driver (Optional)

Mounting

- Recessed plate for transformer box - with center wire hole

Custom

- Custom color temperature 3500K, 4000K - 10 piece minimum order
- Custom color (RAL/Pantone) - 10 piece minimum order


4. Design your layout

Using the pendant and the 2 or 3 Connections large scale layouts can be created.


Note: Each pendant will require its own junction box/power source. There is no limit to how many fixtures can be connected together.

Sample configurations:


2 Connections

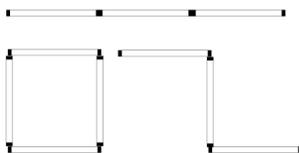

3 Connections

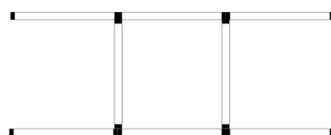


2 and 3 Connections

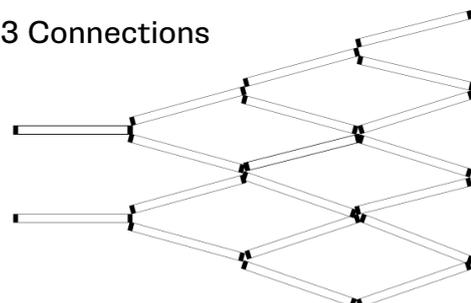

Accessories

F39 Z01A - 2 Connections

Non-conductive mobile joint for connecting 2 Pivot pendants together. Connections can be in a straight line or up to 90°. Use this connection to create long lines of light or to create squares, rectangles or in conjunction with the 3 Connections piece to create more complex shapes.

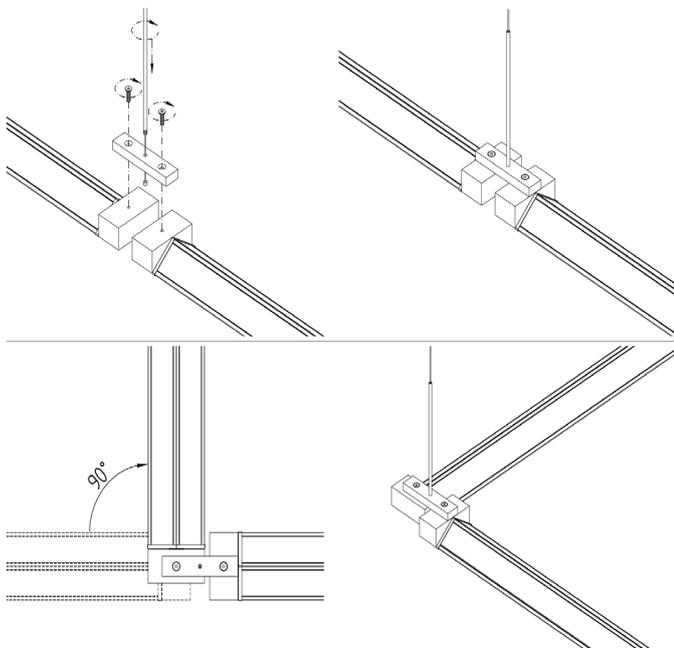

F39 Z03A 3 Connections

Non-conductive mobile joint for connecting 3 Pivot pendants together. Connection angles can be up to 90°, this allows for the creation of unique shapes and designs. Use together with the 2 Connections for more complex shapes.

