

Faretti D27 Crystal Trims

Project Reference

Fixture Type

Selected Product Model



Recessed Crystal and Glass Downlights

After intense research on shapes in spaces, Pamio Design Studio succeeded in creating a wide range of recessed lighting fixtures that are both functional and exquisite. The shapes, facets, materials, and finishes were conceived to produce the best lighting possible while adding a touch of elegance to the usual recessed spotlights making the space less technical and cold.

The result is the D27 Faretti series, a range of “small gems of light”, that enhance the ceiling in any space, creating elegant, unique atmospheres. Recessed lighting fixtures are for indoor use with housings available for Remodel, New Construction, and Insulated Ceilings. Match with Crystal and Glass Trims in both transparent or satin finishes, and some with stainless steel front plates. Trims are available for DRY (open glass) or DAMP (closed glass) applications.

 Cheope LED Clear D27 F37RM 00 D27 F07RM 00 D27 F37NC 00 D27 F07NC 00 D27 F37IC 00 D27 F07IC 00  White D27 F37RM 01 D27 F07RM 01 D27 F37NC 01 D27 F07NC 01 D27 F37IC 01 D27 F07IC 01	 Cindy LED Clear D27 F49RM 00 D27 F28RM 00 D27 F49NC 00 D27 F28NC 00 D27 F49IC 00 D27 F28IC 00  White D27 F49RM 01 D27 F28RM 01 D27 F49NC 01 D27 F28NC 01 D27 F49IC 01 D27 F28IC 01	 Eli LED Clear D27 F54RM 00 D27 F51RM 00 D27 F54NC 00 D27 F51NC 00 D27 F54IC 00 D27 F51IC 00  White D27 F54RM 01 D27 F51RM 01 D27 F54NC 01 D27 F51NC 01 D27 F54IC 01 D27 F51IC 01
 Jnat LED Clear D27 F33RM 00 D27 F03RM 00 D27 F33NC 00 D27 F03NC 00 D27 F33IC 00 D27 F03IC 00  White D27 F33RM 01 D27 F03RM 01 D27 F33NC 01 D27 F03NC 01 D27 F33IC 01 D27 F03IC 01	 Lei LED Clear D27 F43RM 00 D27 F13RM 00 D27 F43NC 00 D27 F13NC 00 D27 F43IC 00 D27 F13IC 00  Steel D27 F44RM 35 D27 F15RM 35 D27 F44NC 35 D27 F15NC 35 D27 F44IC 35 D27 F15IC 35	 Lui LED Clear D27 F39RM 00 D27 F09RM 00 D27 F39NC 00 D27 F09NC 00 D27 F39IC 00 D27 F09IC 00  Steel D27 F40RM 35 D27 F11RM 35 D27 F40NC 35 D27 F11NC 35 D27 F40IC 35 D27 F11IC 35
 Rombo LED Clear D27 F59RM 00 D27 F56RM 00 D27 F59NC 00 D27 F56NC 00 D27 F59IC 00 D27 F56IC 00  White D27 F59RM 01 D27 F56RM 01 D27 F59NC 01 D27 F56NC 01 D27 F59IC 01 D27 F56IC 01	 Tondo LED Clear D27 F64RM 00 D27 F61RM 00 D27 F64NC 00 D27 F61NC 00 D27 F64IC 00 D27 F61IC 00  White D27 F64RM 01 D27 F61RM 01 D27 F64NC 01 D27 F61NC 01 D27 F64IC 01 D27 F61IC 01	
 Easy LED White D14 F45RM 01 D14 F45NC 01 D14 F45IC 01	Housing Descriptions LED GU10 Integral LED GU10 Lamp RM- Remodel RM- Remodel NC- New Construction NC- New Construction IC- Insulation Contact IC- Insulation Contact	Custom Options To order, add custom codes to end of standard model numbers D27F-MOD-2700K - 2700K, 92+CRI D27F-MOD-3500K - 3500K, 92+CRI D27F-MOD-4000K - 4000K, 92+CRI D27F-MOD-DRVR-277V-ELV - 277V only, ELV Dimming D27F-MOD-DRVR-UNV-010V - 0-10V dimming (NC and IC Only) D27F-MOD-HI-OUTPUT - 1918 Initial Lumens, 93+CRI (NC Only) D27SC - 12" Safety cable with safety clamp for Faretti Glass




Reference the specific housing sheet needed for technical information, fixture performance data, and available options.




Project Reference

Fixture Type


Selected Product Model

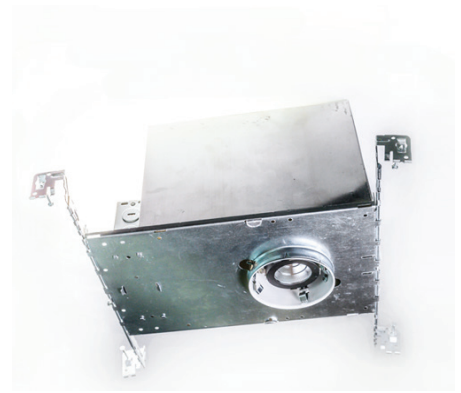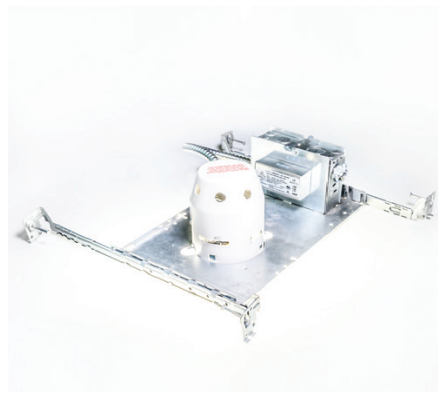

RM LED
Integral LED Remodel Applications



NC LED
Integral LED for New Construction



IC LED
Integral LED, Insulated Ceiling Contact

Description

After intense research on shapes in spaces, Pamio Design Studio succeeded in creating a wide range of recessed lighting fixtures that are both functional and exquisite. The shapes, facets, materials, and finishes were conceived to produce the best lighting possible while adding a touch of elegance to the usual recessed spotlights making the space less technical and cold.

The result is the D27 Faretti series, a range of "small gems of light", that enhance the ceiling in any space, creating elegant, unique atmospheres. Recessed lighting fixtures are for indoor use with housings available for Remodel, New Construction, and Insulated Ceilings. Match with Crystal and Glass Trims in both transparent or satin finishes, and some with stainless steel front plates.

Trims are available for DRY (open glass) or DAMP (closed glass) applications.

Optical assembly

- Bridgelux BXRC-30E2000-C-23 Remote Phosphor LED Module
- 40 Degree Optical Assembly with Integral Heatsink
- >93+ CRI
- Field Accessible and Replaceable

Product performances

- LED 500mA
- 1x16W - 40°
- WHITE 3000K, 93+CRI
- 1000 Source lumens

Hm	BEAM (ft)	FC
8'	5.8	41
10'	7.2	26
12'	8.6	18
14'	10.1	14



Weight

5.51 lb

Electrical & dimming

- 120V Only
- Dimmable to 10% with ELV Dimmer

Mechanical

Remodel Housing:

- Housing is designed for Remodel installations up to 5/8" thick ceilings and not for contact with insulation
- (4) Clips are used to lock fixture into place
- Multiple knockouts located on (4) sides of the driver box for easier installation access

New Construction (NC) and Insulated Ceiling (IC) Housings:

- Trim on housing is preset for 1/2" drywall and field adjustable to work with up to 2.5" ceiling thickness
- Hanger Bars adjustable from 13" to 25" for joist and grid ceiling installations
- Pre-attached nails included on hanger bars
- Housing is designed for New Construction installations
- NC - Not for contact with insulation
- IC - For direct insulation contact

Product options (Minimum order quantities may apply)

Driver

- D27F-MOD-DRVR-277V-ELV - 277V Only, ELV Dimming
- D27F-MOD-DRVR-UNV-010V - 0-10V dimming (NC and IC only)

Safety Clip

- D27F-SC - 12" Safety cable with safety clamp for Faretti Glass

CCT

- D27F-MOD-2700K - 2700K, 93CRI
- D27F-MOD-3500K - 3500K, 93CRI
- D27F-MOD-4000K - 4000K, 93CRI

High Output:

- D27F-MOD-HI-OUTPUT - 1918 Initial Lumens, 93CRI. (NC Only)

Listing & warranties

ETL Listed to UL 1578 Standard



* Options listed are available with extended lead times; minimum order quantities may apply

Pictures, descriptions, dimensions and technical data have to be considered as purely indicative. While maintaining the basic characteristics of the product, the manufacturer reserves the right to make modifications at any time with the sole aim of improvement.