

Light Glide F57A11A01


Cory Grosser



Fixture Type
Project Name



Dimensions

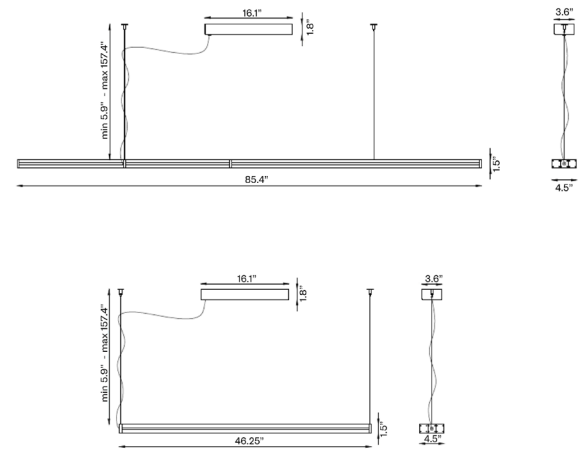

Description

Dynamic linear pendant that provides direct and indirect illumination. Light Glide expands from 46" to 85". White anodized finish. 0-10V dimming with independent operation of direct and indirect sources.

Voltage

120V-277V (UNV)

Dimmable

0-10V

Specs



DRY IP40

Material

Aluminum, prismatic PMMA

Light source and Technical

Lamp Type: LED

Wattage: 150 Watt

Color Temperature: 3000K

CRI: 85+

Lumens: Source - Up: 11923 lm Down: 11923lm; Delivered - Up: 8051 lm Down: 9652 lm

Average LED Life: 50,000 hours L80/B10

Operating Temperature: 14~113°F (-10~45°C)

Notes

Low Glare

Flicker-Free

3 McAdam Step binning

Included accessories

LED

Not included accessories

Color

White

Other colors available



Check online www.fabbian.us


Weight Lamp


Net: 17lb(7.7Kg)



Light Glide F57


Other options

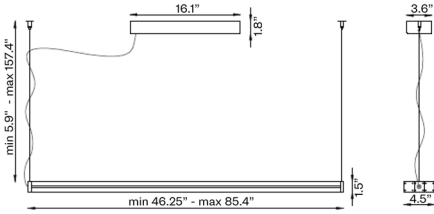
	code	electrification	technical info	color
	F57 A11 A 02 F57 A11 A 01	150W 120-277(UNV) 3000K LED	 DRY	Black White



F57 A13 A 02 F57 A13 A 01	150W 120-277(UNV) 4000K LED	 DRY	Black White
--	-----------------------------	---	----------------

	F57 A51 A 02 F57 A51 A 01	50W120-277(UNV) 3000K LED	 DRY	Black White
---	--	---------------------------	--	----------------

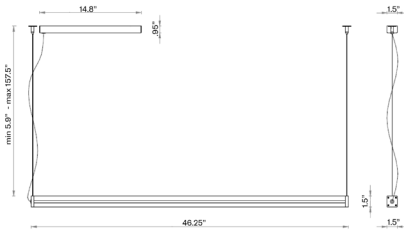

F57 A53 A 02 F57 A53 A 01	50W120-277(UNV) 4000K LED	 DRY	Black White
--	---------------------------	---	----------------