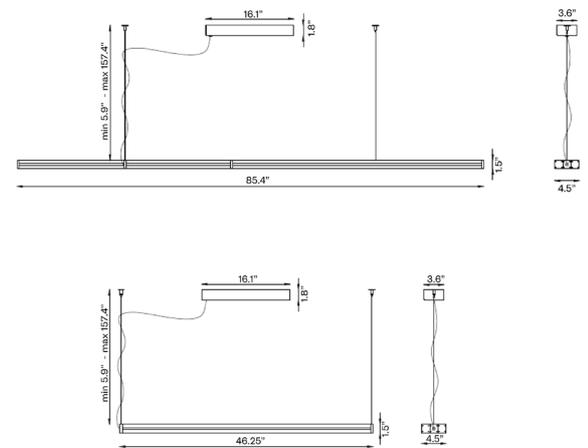# :Fabbian

Light Glide
F57A11A02
Cory Grosser

Fixture Type

Project Name

Description
Dynamic linear pendant that provides direct and indirect illumination. Light Glide expands from 46" to 85". Black anodized finish. 0-10V dimming with independent operation of direct and indirect sources.

Voltage	Dimmable	Specs
120V-277V (UNV)	0-10V	ETL Intertek DRY IP40

Light source and Technical
Lamp Type: LED
Wattage: 150 Watt
Color Temperature: 3000K
CRI: 85+
Lumens: Source - Up: 11923 lm Down: 11923lm; Delivered - Up: 8051 lm Down: 9652 lm
Average LED Life: 50,000 hours L80/B10
Operating Temperature: 14~113°F (-10~45°C)

Notes
Low Glare
Flicker-Free
3 McAdam Step binning

Included accessories
LED

Not included accessories

Weight Lamp
Net: 17lb(7.7Kg)

Dimensions

Material
Aluminum, prismatic PMMA

Color
■ Black

Other colors available
Check online www.fabbian.us

Light Glide F57

Other options

	code	electrification	technical info	color
	F57 A11 A 02 **F57 A11 A 01**	150W 120-277(UNV) 3000K LED	ETL Intertek DRY	Black White
	F57 A13 A 02 **F57 A13 A 01**	150W 120-277(UNV) 4000K LED	ETL Intertek DRY	Black White
	F57 A51 A 02 **F57 A51 A 01**	50W120-277(UNV) 3000K LED	ETL Intertek DRY	Black White
	F57 A53 A 02 **F57 A53 A 01**	50W120-277(UNV) 4000K LED	ETL Intertek DRY	Black White
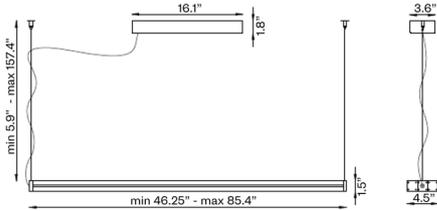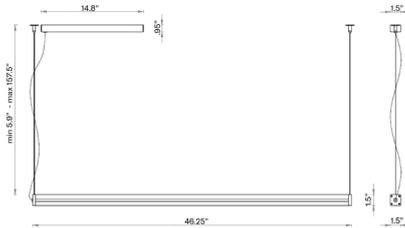
16.1"
1.8"
3.6"
min 5.9" - max 157.4"
min 46.25" - max 85.4"
1.5"
4.5"

14.8"
.95"
1.5"
min 5.9" - max 157.5"
46.25"
1.5"
1.5"