

Multispot F32


F32L31A00

Marc Sadler




Fixture type

Project name



Dimensions

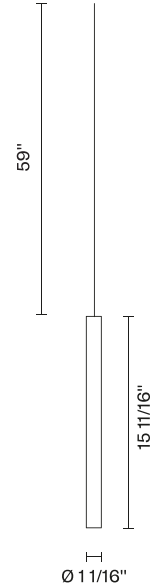

Material

Pyrex® glass - Aluminium

Color

Clear

Other colors available

Check online www.fabbian.us

Included accessories

LED

Not included accessories

Component Only as part of system; Drivers, System Connectors Not Included. Reference www.fabbian.us for drivers, connectors, and other system options

Notes

Driver selection will determine input voltage and dimming capabilities.

Description

The five-foot 24V pendant component of the Tooby series- features a cylindrical light element in borosilicate glass (Pyrex) with anodized aluminum hardware and ribbed plastic internal diffusers to evenly distribute the light throughout the tube. 24V offers simplified wiring and greater dimming control. 24V models can be dimmed to 0.5% dimming with the appropriate driver (sold separately) and can be used with Lutron, EldoLED, and other High-performance drivers as part of a dimming control system.

Voltage

24V

Dimmable

Driver Dependent

Specs



DRY

Light source and Technical

Lamp type: LED 1x2.1W

Wattage: 2.1W

Color temperature: 3000K

CRI: >80

Lumens: 200lm