:FABBIAN

Multispot F32

F32L32A00


Marc Sadler

Fixture type

Project name



Dimensions

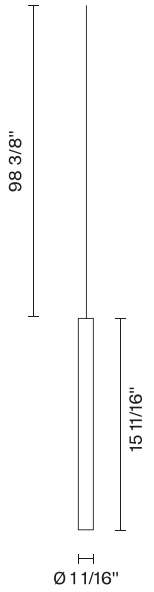

Material

Pyrex® glass - Aluminium

Color

Clear

Other colors available

Check online www.fabbian.us

Included accessories

LED

Not included accessories

Component Only as part of system; Drivers, System Connectors Not Included.Reference www.fabbian.us for drivers,connectors, and other system options

Notes

Driver selection will determine input voltage and dimming capabilities.

Description

The eight-foot 24V pendant component of the Tooby series- features a cylindrical light element in borosilicate glass (Pyrex) with anodized aluminum hardware and ribbed plastic internal diffusers to evenly distribute the light throughout the tube. 24V offers simplified wiring and greater dimming control. 24V models can be dimmed to 0.5% dimming with the appropriate driver (sold separately) and can be used with Lutron, EldoLED, and other High-performance drivers as part of a dimming control system.

Voltage	Dimmable
24V	Driver Dependent

Specs

DRY

Light source and Technical

Lamp type: LED 1x2.1W
Wattage: 2.1W
Color temperature: 3000K
CRI: >80
Lumens: 200lm

Fabbian Usa Corp. | 307 W 38th St Ste 1103, New York, NY 10018 (USA) | ph. +1 646 518 4160 | fax +1 646 518 4180 | www.fabbian.us | usa@fabbian.com canada@fabbian.com
Pictures, descriptions, dimensions and technical data have to be considered as purely indicative. While maintaining the basic characteristics of the product, the manufacturer reserves the right to make modifications at any time with the sole aim of improvement.