

Multispot Tooby

F32L0xA00


Fixture Type

Project Name

Nanne de Ru / Marc Sadler / Flynn Talbot



Dimensions

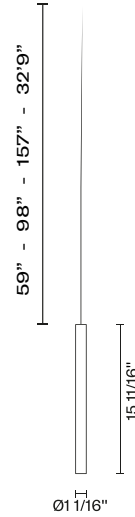

F32 L01 A 00 - 59" Cable (~5')

F32 L02 A 00 - 98 3/8" Cable (~8')

F32 L03 A 00 - 157 7/16" Cable (~13')

F32 L04 A 00 - 32' 9" Cable

Description

The pendant components of the Tooby series- featuring cylindrical light elements in borosilicate glass (Pyrex) with anodized aluminum hardware, and ribbed plastic internal diffusers to evenly distribute the light throughout the tube.

Voltage

700mA

Specs



DRY

Material

Borosilicate glass - Aluminum

Light source

LED 1x3W
2700K
200lm CRI >80

Color

Transparent

Notes

Create a custom Multispot Tooby configuration by selecting number of pendants, pendant heights, and canopies. Select a standard or custom canopy or a trimless mounting kit.

Dimming is based on driver capabilities (minimum of 3 pendants required to dim, single pendants are not dimmable).

If running multiple units on one driver, fixtures must be series wired and meet minimum load ratings of the connected driver; parallel wiring of pendants will result in non-warranty failure.

Alternate 24V models available for simplified dimming control if needed.

Included accessories

LED

Accessories Not Included

Driver - Remote driver required
Canopy or J-box with cover plate or trimless mounting kit

In the same family



Betuga

Shipping volume and weight

0.60 cubic feet - 3.31 pounds